
DATA SHEET

RELEASE Ø DATA SHEET





GRF0020

GaN HEMT Power Transistor
30 Watt P3dB
DC to 7 GHz

FEATURES

- Operating Frequency Range: DC to 7 GHz
- Operating Drain Voltage: 28 and 50 Volt
- Maximum Output Power: 30 Watt (P3dB)
- Suitable for Pulsed, Linear Applications
- 100% DC & RF Production Tested
- Compact 3 x 3 mm QFN-16 Package

Reference: 50 V / 30 mA / 3.5 GHz

- Saturated Gain: 13.5 dB
- Saturated Drain Efficiency: 51 %
- Saturated Output Power: 45.1 dBm

APPLICATIONS


- Cellular Infrastructure
- Radar
- Communications
- Test Instrumentation

DESCRIPTION


The GRF0020 is a 30 W (P3dB) unmatched discrete GaN-on-SiC HEMT which operates from DC to 7 GHz on a 50 volt supply rail. The wide bandwidth makes GRF0020 suitable for a variety of applications including cellular infrastructure, radar, communications, and test instrumentation, and can support both linear and pulse operations. The device is housed in an industry-standard 3 x 3 mm surface mount QFN-16 package. Lead free and RoHS compliant.

Please consult with the GRF applications engineering team for custom tuning/evaluation board data.

BLOCK DIAGRAM

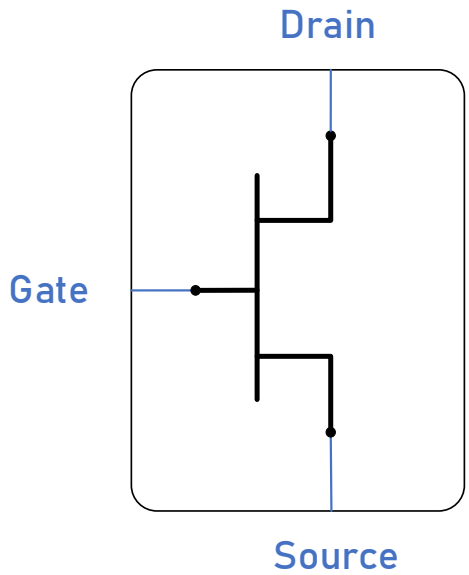

Guerrilla RF Proprietary Information. • ©2025 Guerrilla RF, Inc. • All rights reserved. • August 11, 2025

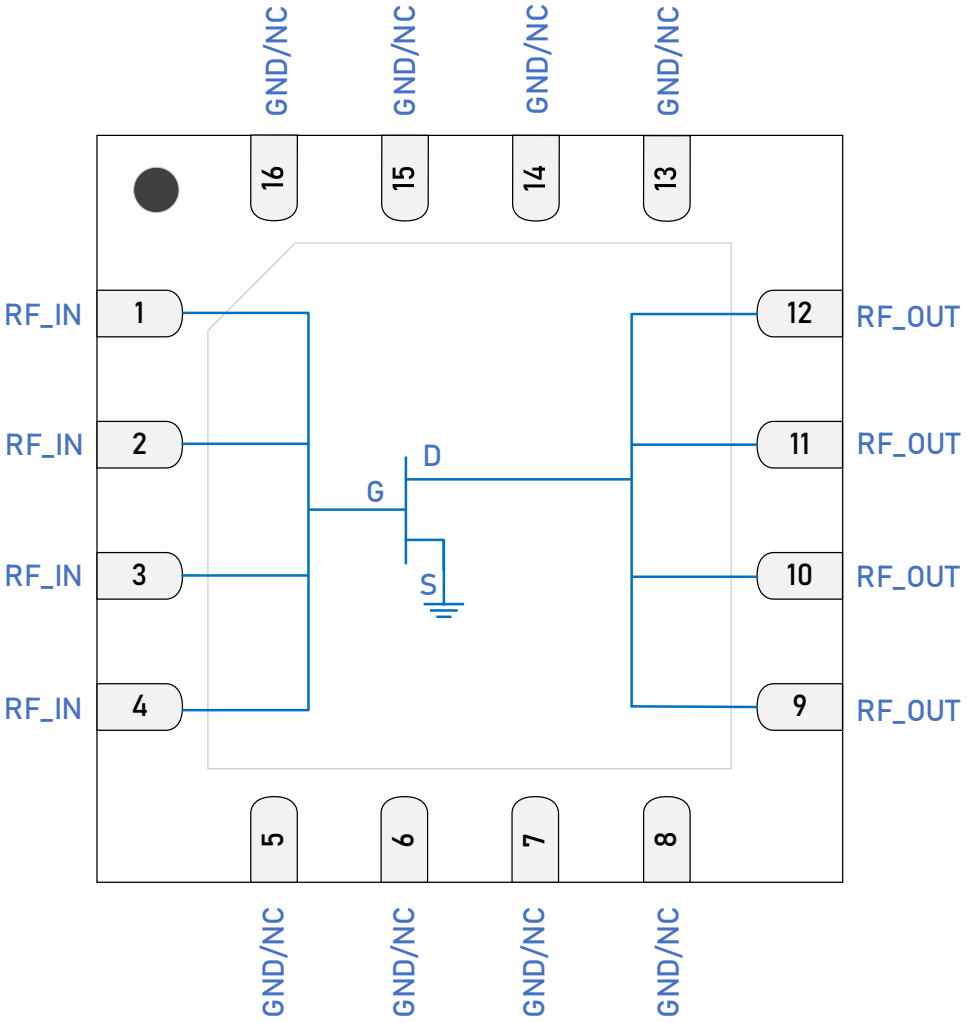

3 x 3 mm Pin Out (Top View)

Guerrilla RF Proprietary Information. • ©2025 Guerrilla RF, Inc. • All rights reserved. • August 11, 2025

www.guerrilla-rf.com • (336) 510-7840 • sales@guerrilla-rf.com • 2000 Pisgah Church Road. Greensboro, NC 27455

Pin Assignments

Pin	Name	Description	Note
1, 2, 3, 4	RF_IN	Gate Voltage	Connected to GATE terminal of GaN transistor.
5, 6, 7, 8, 13, 14, 15, 16	GND/NC	Ground or No Connect	No internal connection to die. It is strongly recommended that these pins be connected to ground.
9, 10, 11, 12	RF_OUT	Drain Voltage	Connected to DRAIN terminal of GaN transistor.
PKG BASE	SOURCE	Source Connection	Connected to the SOURCE terminals of the GaN transistor. Provides DC and RF ground as well as thermal heat sink. **In order to match the device's rated performance, it is strongly recommended to use multiple thermal vias beneath the package for optimal RF and thermal performance**. Refer to evaluation board top layer graphic on schematic page.

GaN HEMT Power-up / Power-down Procedure:

To turn the transistor ON:

1. Set V_{GS} to -5 V.
2. Turn on V_{DS} to normal operation voltage (50 V).
3. Slowly increase V_{GS} to set I_{DS} current to 30 mA.
4. Apply RF power.

To turn the transistor OFF:

1. Turn the RF power off.
2. Decrease V_{GS} to -5 V.
3. Turn off V_{DS}. Wait a few seconds for Drain capacitor to discharge.
4. Turn off V_{GS}.

Guerrilla RF Proprietary Information. • ©2025 Guerrilla RF, Inc. • All rights reserved. • August 11, 2025

Absolute Ratings

Parameter	Symbol	Min.	Max.	Unit
Operating Voltage	V_{DS}		55	V
Drain to Gate Breakdown Voltage	B_{VDG}		TBD	V
Drain to Source Voltage	V_{DS}		150	V
Gate to Source Voltage	V_{GS}	-8	2	V
Drain Current	I_D		TBD	mA
RF Input Power: 50 Ω, V_{DS} = 50 V, I_{DS} = 30 mA, $T_{PKG\ BASE}$ = 85 °C.	$P_{IN\ MAX}$		TBD	dBm
RF Input Power: 10:1 VSWR, V_{DS} = 50 V, I_{DS} = 30 mA, $T_{PKG\ BASE}$ = 85 °C.	$P_{IN\ MAX}$		TBD	dBm
Output Mismatch Stress: V_{DS} = 50 V, P_{OUT} = P_{SAT} pulsed = TBD.	$VSWR_{MAX}$		TBD	
Operating Temperature (package base).	$T_{PKG\ BASE}$	-40	105	°C
Maximum Junction Temperature (MTTF > 10^6 hours).	$T_{J\ MAX}$		225	°C
Maximum Dissipated Power	$P_{DISS\ MAX}$		TBD	W

Electrostatic Discharge

Human Body Model	HBM	200		V
Charged Device Model	CDM	500		V

Storage

Storage Temperature	T_{STG}	-65	150	°C
Moisture Sensitivity Level	MSL		1	--

Note 1: Exceeding any of these limits may cause permanent damage to the device or reduce the lifetime (MTTF).
Note 2: Guerrilla-RF does not recommend sustained operation above the maximum operating conditions.

Caution! ESD Sensitive Device.
Exceeding Absolute Maximum Rating conditions may cause permanent damage.

Note: For additional information, please refer to *Manufacturing Note MN-001 — Package and Manufacturing Information.*

All Guerrilla RF products are provided in RoHS compliant lead (Pb)-free packaging requiring no exemptions. Additional information for this topic can be found at this link - *Environmental and Restricted Substance Statement Library*

Guerrilla RF Proprietary Information. • ©2025 Guerrilla RF, Inc. • All rights reserved. • August 11, 2025

www.guerrilla-rf.com • (336) 510-7840 • sales@guerrilla-rf.com • 2000 Pisgah Church Road. Greensboro, NC 27455

Recommended Operating Conditions

V_{DS} = 50 V

Parameter	Symbol	Specification			Unit	Condition
		Min.	Typ.	Max.		
RF Frequency Range	F_{TEST}	DC	3.5	7	GHz	Typical application schematic **(notes 3 & 4)**.
Drain to Source Voltage	V_{DS}	TBD	50	TBD	V	Typical application schematic.
Drain Current (Quiescent)	I_{DQ}		30		mA	Typical application schematic.
Drain Current: RF	$I_{D\ DRIVE}$		1219		mA	Typical application schematic.
Gate Voltage	V_{GS}		-2.56		V	Typical application schematic.
Gate Current: RF	$I_{G\ DRIVE}$		TBD		mA	Typical application schematic, P_{OUT} = 30 W.
Operating Temperature	$T_{PKG\ BASE}$	-40		85	°C	On package base.
Gate Port Impedance	$Z_{RF\ IN}$		50		Ω	Typical application schematic.
Drain Port Impedance	$Z_{RF\ OUT}$		50		Ω	Typical application schematic.

V_{DS} = 28 V

Parameter	Symbol	Specification			Unit	Condition
		Min.	Typ.	Max.		
RF Frequency Range	F_{TEST}	DC	3.5	7	GHz	Typical application schematic **(notes 3 & 4)**.
Drain to Source Voltage	V_{DS}	TBD	28	TBD	V	Typical application schematic.
Drain Current (Quiescent)	I_{DQ}		30		mA	Typical application schematic.
Drain Current: RF	$I_{D\ DRIVE}$		TBD		mA	Typical application schematic.
Gate Voltage	V_{GS}		-2.54		V	Typical application schematic.
Gate Current: RF	$I_{G\ DRIVE}$		TBD		mA	Typical application schematic, P_{OUT} = 30 W.
Operating Temperature	$T_{PKG\ BASE}$	-40		85	°C	On package base.
Gate Port Impedance	$Z_{RF\ IN}$		50		Ω	Typical application schematic.
Drain Port Impedance	$Z_{RF\ OUT}$		50		Ω	Typical application schematic.

Note 3: Operation outside of this range is possible but with degraded performance of some parameters.

Note 4: Contact the Guerrilla RF applications team for guidance on optimizing the tuning of the device for alternative bands.

Guerrilla RF Proprietary Information. • ©2025 Guerrilla RF, Inc. • All rights reserved. • August 11, 2025

Nominal Operating Parameters – General

The following conditions apply unless noted otherwise: typical application schematic using the 2.3 to 3.8 GHz tuning set, I_{DS} = 30 mA, P_{OUT} = 30 W, F_{TEST} = 3.5 GHz, Pulsed CW (100 µs pulse width, 10% duty cycle, no modulation), 50 Ω system impedance, T_{AMB} = 25 °C, $T_{PKG\ BASE}$ = -40 to 85 °C. Evaluation board losses are included within the specifications.

V_{DS} = 50 V

Parameter	Symbol	Specification			Unit	Condition
		Min.	Typ.	Max.		
Drain Source Breakdown Voltage	B_{VDS}	150			V	
Drain Source Leakage Current	I_{DLK}		50		µA	V_{GS} = -8 V, V_{DS} = 50 V.
Drain Current: Quiescent	I_{DQ}		30		mA	No RF applied.
Gate Threshold Voltage	V_{GS}	-3.4		-1.5	V	V_{DS} = 50 V.
Gate Bias Voltage	V_{GS}		-2.56		V	
Drain Voltage	V_{DS}		50		V	
Drain Current: RF	$I_{D\ DRIVE}$		1219		mA	RF applied, P_{OUT} = 30 W.
Gate Current: RF	$I_{G\ DRIVE}$		TBD		mA	RF applied, P_{OUT} = 30 W.
Gate Leakage Current	$I_{G\ LEAK}$		8		mA	

V_{DS} = 28 V

Parameter	Symbol	Specification			Unit	Condition
		Min.	Typ.	Max.		
Drain Source Breakdown Voltage	B_{VDS}	150			V	
Drain Source Leakage Current	I_{DLK}		TBD		µA	V_{GS} = -8 V, V_{DS} = 50 V.
Drain Current: Quiescent	I_{DQ}		30		mA	No RF applied.
Gate Threshold Voltage	V_{GS}	-3.4		-1.5	V	V_{DS} = 50 V.
Gate Bias Voltage	V_{GS}		-2.54		V	
Drain Voltage	V_{DS}		28		V	
Drain Current: RF	$I_{D\ DRIVE}$		TBD		mA	RF applied, P_{OUT} = 30 W.
Gate Current: RF	$I_{G\ DRIVE}$		TBD		mA	RF applied, P_{OUT} = 30 W.
Gate Leakage Current	$I_{G\ LEAK}$		8.4		mA	

Thermal Data

Thermal Resistance (Infrared Scan)	θ_{JC}		TBD		°C/W	P_{OUT} = TBD. On standard evaluation board.
Channel Temperature	$T_{CHANNEL}$		TBD		°C	

Note 5: MIN/MAX limits defined using modelled estimates that account for part-to-part variations and expected process spreads. As additional production lots are fabricated, accumulated test data will be used to refine the MIN/MAX limits.

Guerrilla RF Proprietary Information. • ©2025 Guerrilla RF, Inc. • All rights reserved. • August 11, 2025

Nominal Operating Parameters – RF: DC to 7 GHz

The following conditions apply unless noted otherwise: typical application schematic using the 2.3 to 3.8 GHz tuning set, I_{DS} = 30 mA, P_{OUT} = 30 W, F_{TEST} = 3.5 GHz, Pulsed CW (100 µs pulse width, 10% duty cycle, no modulation), 50 Ω system impedance, T_{AMB} = 25 °C, $T_{PKG\ BASE}$ = -40 to 85 °C. Evaluation board losses are included within the specifications.

V_{DS} = 50 V

Parameter	Symbol	Specification			Unit	Condition
		Min.	Typ.	Max.		
Small Signal Gain	G_{SS}		11		dB	At I_{DS} ≤ 1.1* I_{DS}.
Power Gain	G_{MAX}		15		dB	Max gain vs. power.
Saturated Gain	G_{SAT}		12.4		dB	At 2.5 dB compression referenced to G_{MAX}.
Saturated Drain Efficiency	$D_{EFF\ SAT}$		50.3		%	
Saturated Output Power	P_{SAT}		45.1		dBm	
Ruggedness	Ψ	At 2.5 dB compression. Output VSWR = 10:1 (all angles)				No damage or shift in performance.

V_{DS} = 28 V

Parameter	Symbol	Specification			Unit	Condition
		Min.	Typ.	Max.		
Small Signal Gain	G_{SS}		11.3		dB	At I_{DS} ≤ 1.1* I_{DS}.
Power Gain	G_{MAX}		14		dB	Max gain vs. power.
Saturated Gain	G_{SAT}		11.4		dB	At 2.5 dB compression referenced to G_{MAX}.
Saturated Drain Efficiency	$D_{EFF\ SAT}$		60.9		%	
Saturated Output Power	P_{SAT}		42.3		dBm	
Ruggedness	Ψ	At 2.5 dB compression. Output VSWR = 10:1 (all angles)				No damage or shift in performance.

Note 6: MIN/MAX limits defined using *modelled estimates* that account for part-to-part variations and expected process spreads. As additional production lots are fabricated, accumulated test data will be used to refine the MIN/MAX limits.

Guerrilla RF Proprietary Information. • ©2025 Guerrilla RF, Inc. • All rights reserved. • August 11, 2025

Typical Performance:

Single-Tone Pulse CW (10% duty cycle, 100 µs pulse width). 2nd Harmonic not optimized.

1. Optimum Peak Power at 2.5 dB in compression.
2. Optimum Peak Efficiency at 2.5 dB in compression.

V_{DS} = 50 V, I_{DS} = 30 mA, T_{AMB} = 25 °C

Frequency (MHz)	P_{OUT}(1) (dBm)	Gain(2) (dB)	Drain Eff(2) (%)
1000	44.94	25.0	71.2
1200	44.9	23.2	68.6
1400	45.1	21.5	70.3
1600	45.03	21.7	67.2
1800	45.1	19.6	68.1
2000	45.27	21.1	68.6
2200	45.40	20.1	66.4
2400	45.28	20.4	63.6
2600	45.37	18.6	62.5
2800	45.33	19.3	61.7
3000	45.37	18.6	62.8
3500	45.43	17.0	65.2
4000	45.3	17.2	62.9
4500	45.3	15.5	63.0
5000	45.16	15.2	61.9
5500	45.2	14.2	61.8
6000	45.24	13.7	61.1

V_{DS} = 28 V, I_{DS} = 30 mA, T_{AMB} = 25 °C

Frequency (MHz)	P_{OUT}(1) (dBm)	Gain(2) (dB)	Drain Eff(2) (%)
1000	42.2	22.9	69.5
1200	42.17	20.6	69.3
1400	42.46	20.1	66.7
1600	42.45	19.1	65.1
1800	42.6	17.9	64.9
2000	42.7	18.1	64.9
2200	42.85	17.9	65.4
2400	42.78	17.1	64.0
2600	42.87	16.9	64.0
2800	42.83	16.8	63.45
3000	42.91	16.2	64.6
3500	42.73	15.5	65.8
4000	42.85	14.1	64.6
4500	42.84	14.5	65.0
5000	42.72	13.2	63.7
5500	42.8	12.4	63.6
6000	42.7	12.0	63.2

Guerrilla RF Proprietary Information. • ©2025 Guerrilla RF, Inc. • All rights reserved. • August 11, 2025

www.guerrilla-rf.com • (336) 510-7840 • sales@guerrilla-rf.com • 2000 Pisgah Church Road. Greensboro, NC 27455

Typical Performance:

Load Pull Measurements: V_{DS} = 50 V, I_{DS} = 30 mA. Single-Tone Pulse CW (10% duty cycle, 100 µs pulse width).

For Optimum Peak Power at 2.5 dB Compression

Frequency (MHz)	Z_{IN} (F0)	ZI (F0)	Gain (dB)	P_{OUT} (dBm)	P_{OUT} (W)	Eff (%)	AMPM (deg)
1000	5.1 -j18.5	28.6 +j3.9	23.9	44.94	31.19	61.3	3.7
1200	5.4 -j16.0	25.5 +j2.8	22.5	44.9	30.9	58.1	4.5
1400	4.9 -j14.1	26.2 +j0.4	20.5	45.1	32.36	55.5	3.2
1600	4.1 -j12.6	22.8 +j10.6	20.5	45.03	31.84	58.7	2.7
1800	4.6 -j11.0	18.9 +j10.2	19.9	45.1	32.36	56.7	3.3
2000	3.4 -j8.4	20.8 +j12.0	19.4	45.27	33.65	59.1	3.6
2200	2.7 -j6.0	20.3 +j8.3	18.7	45.4	34.67	56.0	3.1
2400	2.2 -j4.8	20.5 +j7.8	18.2	45.28	33.73	55.1	2.6
2600	2.1 -j4.1	17.2 +j8.9	18.5	45.37	34.43	55.5	3.1
2800	1.9 -j3.2	16.1 +j10.6	18.4	45.33	34.12	56.6	2.4
3000	1.9 -j2.6	16.1 +j10.8	17.6	45.37	34.43	56.7	2.0
3500	2.0 -j0.4	13.8 +j10.7	16.4	45.43	34.91	58.9	1.4
4000	1.7 +j2.0	11.6 +j8.9	15.8	45.3	33.88	57.2	1.2
4500	1.8 +j3.5	9.9 +j5.9	14.7	45.3	33.88	54.6	0.0
5000	1.6 +j5.5	8.3 +j4.8	14.4	45.16	32.81	56.4	0.8
5500	1.6 +j6.6	7.6 +j3.5	13.4	45.2	33.11	55.9	0.8
6000	2.0 +j7.6	6.8 +j1.6	12.8	45.24	33.42	54.8	1.8

For Optimum Peak Efficiency at 2.5 dB Compression

Frequency (MHz)	Z_{IN} (F0)	ZI (F0)	Gain (dB)	P_{OUT} (dBm)	P_{OUT} (W)	Eff (%)	AMPM (deg)
1000	3.7 -j16.5	44.6 +j24.9	25.0	43.1	20.42	71.2	0.2
1200	4.8 -j14.5	37.2 +j14.8	23.2	44.1	25.7	68.6	6.2
1400	3.1 -j11.3	42.2 +j27.4	21.5	43.2	20.89	70.3	-0.8
1600	3.1 -j9.6	19.8 +j27.1	21.7	43.4	21.88	67.2	0.1
1800	3.5 -j8.7	22.4 +j28.6	19.6	43.9	24.55	68.1	4.7
2000	2.2 -j5.7	14.1 +j29.2	21.1	42.7	18.62	68.6	0.4
2200	2.1 -j4.5	17.9 +j25.3	20.1	43.9	24.55	66.4	0.7
2400	1.9 -j3.6	14.9 +j22.8	20.4	43.54	22.59	63.6	3.0
2600	1.8 -j2.9	19.1 +j18.1	18.6	44.84	30.48	62.5	3.0
2800	1.4 -j2.1	13.4 +j18.1	19.3	44.4	27.54	61.7	1.2
3000	1.5 -j1.3	11.3 +j19.0	18.6	44.1	25.7	62.8	2.0
3500	1.7 +j0.5	9.9 +j16.1	17.0	44.4	27.54	65.2	2.7
4000	1.3 +j2.6	7.1 +j11.0	17.2	44.6	28.84	62.9	0.0
4500	1.5 +j4.5	5.4 +j10.8	15.5	43.73	23.6	63.0	1.6
5000	1.4 +j5.8	4.9 +j7.9	15.2	43.72	23.55	61.9	0.0
5500	1.4 +j7.1	4.5 +j5.4	14.2	44.18	26.18	61.8	0.7
6000	1.6 +j8.5	4.1 +j3.7	13.7	44.17	26.12	61.1	1.2

Guerrilla RF Proprietary Information. • ©2025 Guerrilla RF, Inc. • All rights reserved. • August 11, 2025

Typical Performance:

Load Pull Measurements: V_{DS} = 28 V, I_{DS} = 30 mA. Single-Tone Pulse CW (10% duty cycle, 100 µs pulse width).

For Optimum Peak Power at 2.5 dB Compression

Frequency (MHz)	Z_{IN} (F0)	ZI (F0)	Gain (dB)	P_{OUT} (dBm)	P_{OUT} (W)	Eff (%)	AMPM (deg)
1000	5.5 -j19.4	15.9 -j1.9	21.5	42.2	16.6	57.6	4.1
1200	4.3 -j15.7	18.5 -j 2.3	20.1	42.17	16.48	59.1	2.0
1400	4.4 -j13.7	16.5 -j2.1	18.8	42.46	17.62	57.6	0.8
1600	4.9 -j12.6	14.5 +j1.2	18.3	42.45	17.58	55.7	4.9
1800	3.4 -j10.6	16.3 +j1.0	17.2	42.6	18.2	55.8	2.3
2000	3.5 -j8.3	15.8 +j2.8	17.2	42.7	18.62	57.6	4.3
2200	2.8 -j6.2	14.7 +j1.6	16.9	42.85	19.28	57.0	2.4
2400	2.0 -j4.3	14.7 +j1.3	16.6	42.78	18.97	56.9	1.5
2600	2.0 -j3.5	14.6 +j1.4	16.3	42.87	19.36	57.6	2.2
2800	1.6 -j2.9	14.7 +j1.3	15.9	42.83	19.19	56.2	1.2
3000	1.7 -j2.4	14.7 +j1.4	15.3	42.91	19.54	56.1	0.9
3500	1.9 -j0.1	12.6 +j2.6	14.7	42.73	18.75	58.6	0.9
4000	1.5 +j2.3	12.1 +j0.9	13.8	42.85	19.28	55.8	-1.0
4500	1.6 +j3.9	10.2 +j1.4	13.1	42.84	19.23	58.7	-2.0
5000	1.7 +j5.5	9.7 -j1.1	12.2	42.72	18.71	55.0	-1.1
5500	1.7 +j6.7	8.5 -j1.6	11.5	42.8	19.05	56.4	-1.2
6000	1.8 +j8.1	8.1 -j2.2	10.9	42.7	18.62	56.6	-1.7

For Optimum Peak Efficiency at 2.5 dB Compression

Frequency (MHz)	Z_{IN} (F0)	ZI (F0)	Gain (dB)	P_{OUT} (dBm)	P_{OUT} (W)	Eff (%)	AMPM (deg)
1000	3.5 -j16.8	35.8 +j22.1	22.9	40.5	11.22	69.5	2.0
1200	3.4 -j12.6	34.3 +j10.6	20.6	40.32	10.76	69.3	2.6
1400	3.7 -j11.0	28.2 +j12.3	20.1	40.29	10.69	66.7	1.1
1600	3.3 -j9.7	20.9 +j13.8	19.1	41.06	12.76	65.1	2.1
1800	3.3 -j8.0	19.0 +j22.6	17.9	41.5	14.13	64.9	1.9
2000	2.5 -j6.3	18.9 +j15.5	18.1	41.2	13.18	64.9	2.5
2200	2.0 -j4.3	18.3 +j13.1	17.9	41.5	14.13	65.4	0.8
2400	1.8 -j3.3	18.7 +j12.7	17.1	41.47	14.03	64.0	2.7
2600	1.5 -j2.2	16.8 +j11.2	16.9	41.7	14.79	64.0	1.1
2800	1.5 -j2.0	15.2 +j9.8	16.8	42.01	15.89	63.45	1.5
3000	1.4 -j1.2	13.9 +j11.5	16.2	41.82	15.21	64.6	0.0
3500	1.6 +j0.6	9.8 +j10.8	15.5	41.27	13.4	65.8	0.0
4000	1.3 +j2.9	9.24 +j8.1	14.1	41.7	14.79	64.6	-1.6
4500	1.4 +j4.4	6.0 +j5.4	14.5	41.25	13.34	65.0	-4.0
5000	1.4 +j6.2	6.1 +j4.2	13.2	41.27	13.4	63.7	-2.6
5500	1.2 +j7.4	5.4 +j1.7	12.4	41.68	14.72	63.6	-4.7
6000	1.4 +j8.9	4.4 +j0.7	12.0	41.0	12.59	63.2	-4.7


Guerrilla RF Proprietary Information. • ©2025 Guerrilla RF, Inc. • All rights reserved. • August 11, 2025

www.guerrilla-rf.com • (336) 510-7840 • sales@guerrilla-rf.com • 2000 Pisgah Church Road. Greensboro, NC 27455

Load Pull Measurement Notes:

1. Source and load impedance at 2nd harmonic are set to 10 Ω.
2. With proper 2nd harmonic termination, expect +5% efficiency for Source and similar with Drain 2nd harmonic.
3. Z_{LOAD}: measured impedance presented to the output of the device in the reference plane.
4. Z_{IN}: measured input impedance at the input of the device in the reference plane.


Impedance Reference Plane

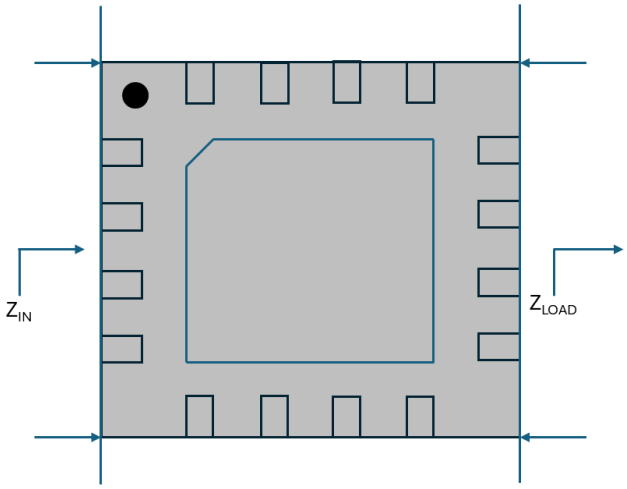


Raw data and full Load Pull measurement report available at request: sales@guerrilla-rf.com

Guerrilla RF Proprietary Information. • ©2025 Guerrilla RF, Inc. • All rights reserved. • August 11, 2025

Typical Operating Curves: Maximum Available Gain and K-Factor vs. Frequency

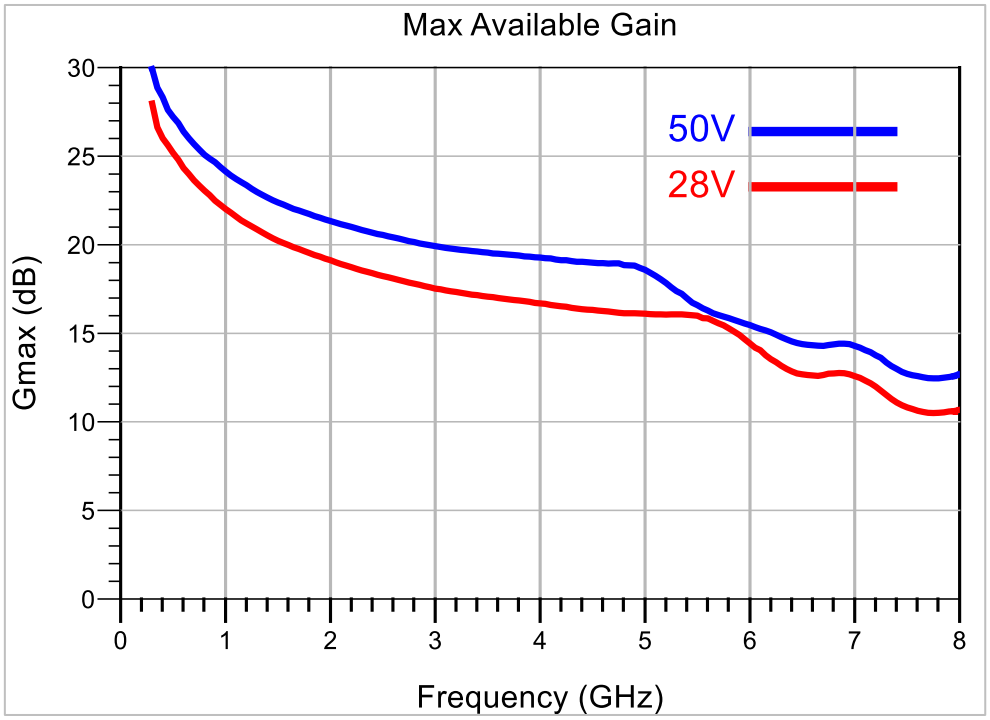

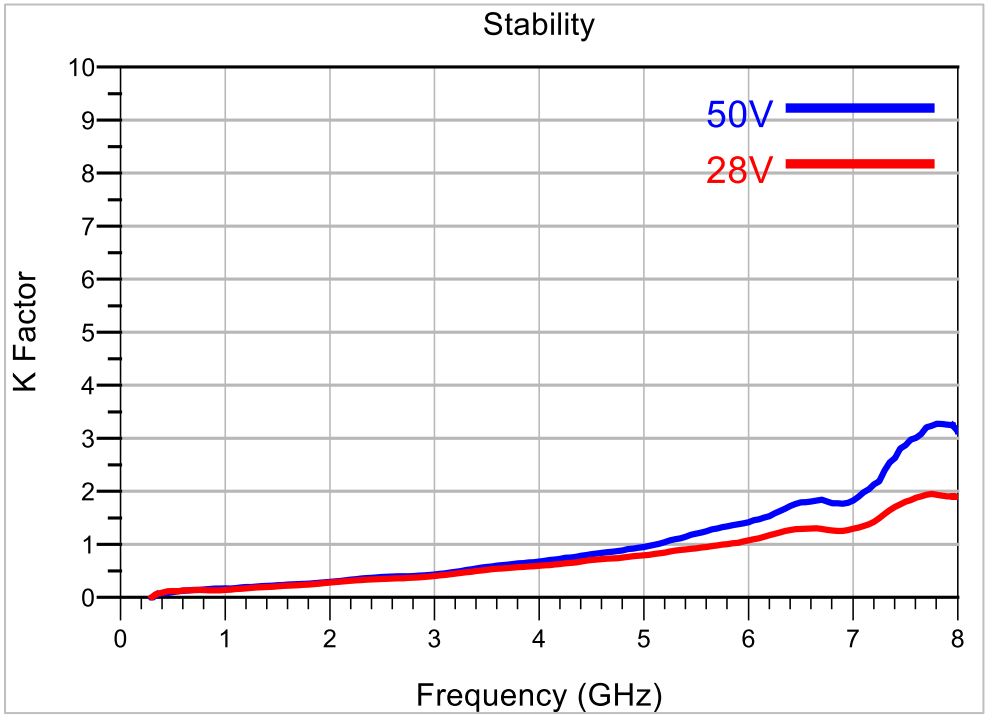


Guerrilla RF Proprietary Information. • ©2025 Guerrilla RF, Inc. • All rights reserved. • August 11, 2025


www.guerrilla-rf.com • (336) 510-7840 • sales@guerrilla-rf.com • 2000 Pisgah Church Road. Greensboro, NC 27455

Typical Operating Curves: 2.3 to 3.8 GHz, 50 V, Pulsed CW (10% duty cycle, 100 µs pulse width)

Gain vs. Output Power and Frequency

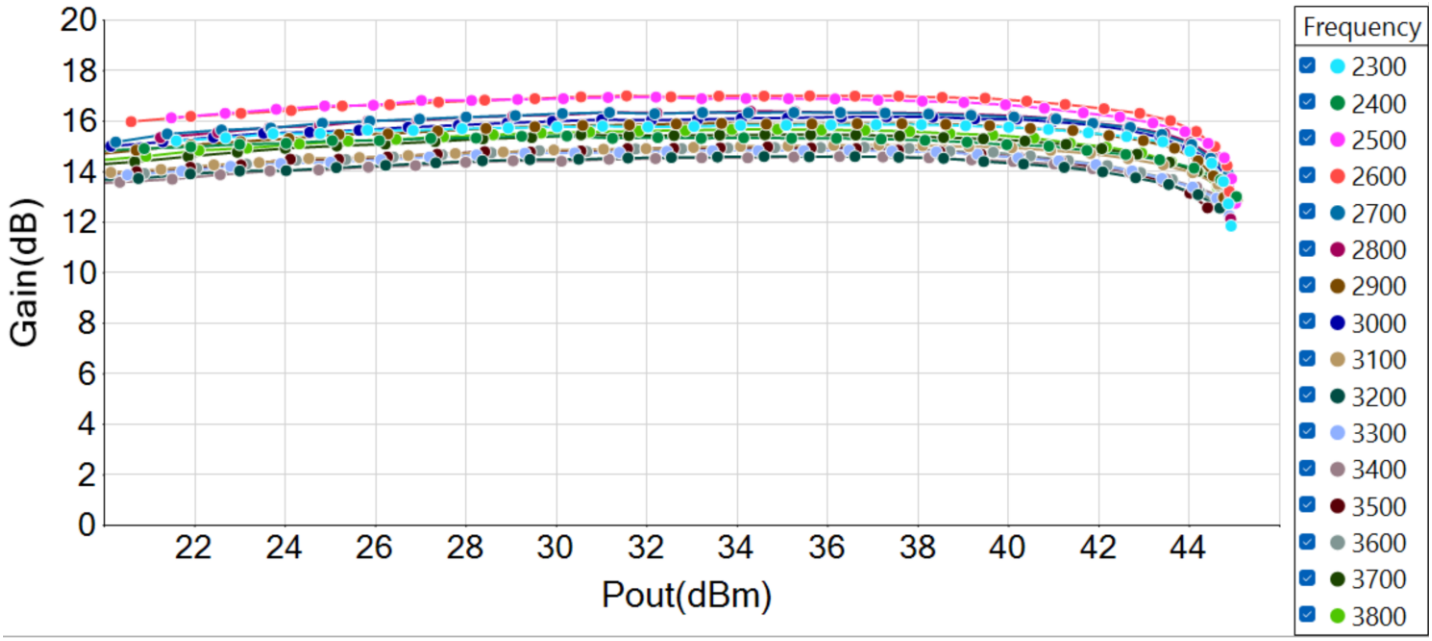


Drain Efficiency vs. Output Power and Frequency

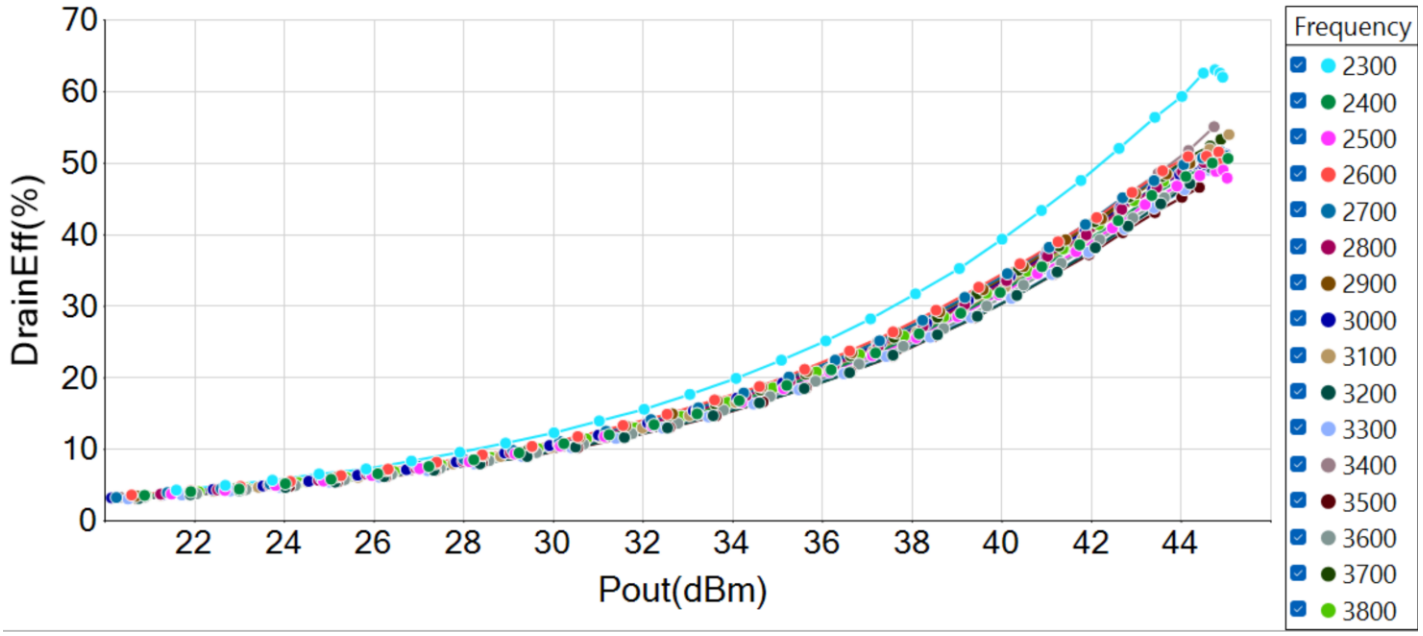


Guerrilla RF Proprietary Information. • ©2025 Guerrilla RF, Inc. • All rights reserved. • August 11, 2025

Typical Operating Curves: 2.3 to 3.8 GHz, 50 V, Pulsed CW (10% duty cycle, 100 µs pulse width)

Gain vs. Frequency: 2.5 dB Compression

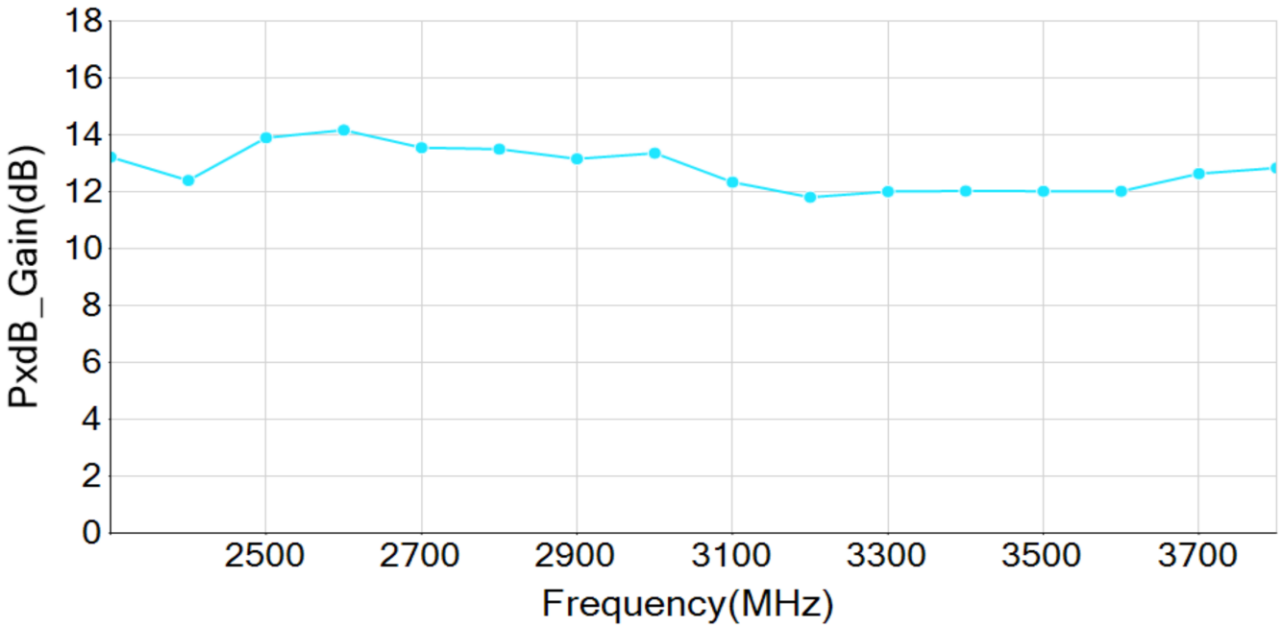

P_{OUT} vs. Frequency: 2.5 dB Compression

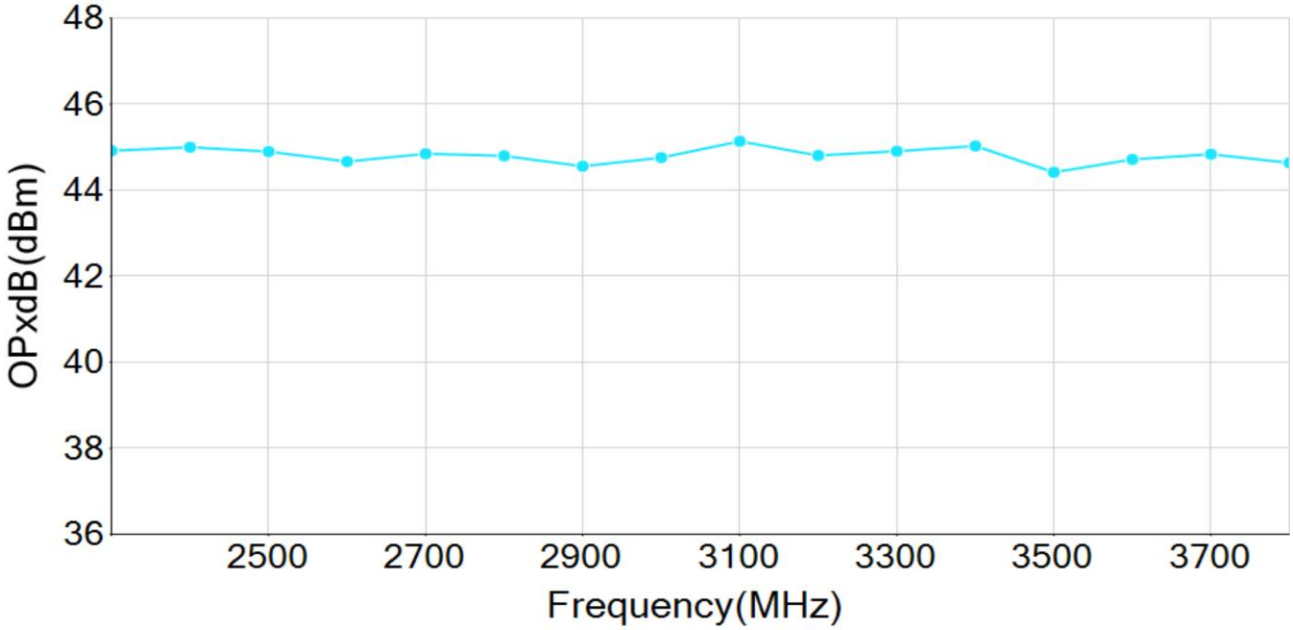


Guerrilla RF Proprietary Information. • ©2025 Guerrilla RF, Inc. • All rights reserved. • August 11, 2025

www.guerrilla-rf.com • (336) 510-7840 • sales@guerrilla-rf.com • 2000 Pisgah Church Road. Greensboro, NC 27455


Typical Operating Curves: 2.3 to 3.8 GHz

Drain Efficiency vs. Frequency: 2.5 dB Compression

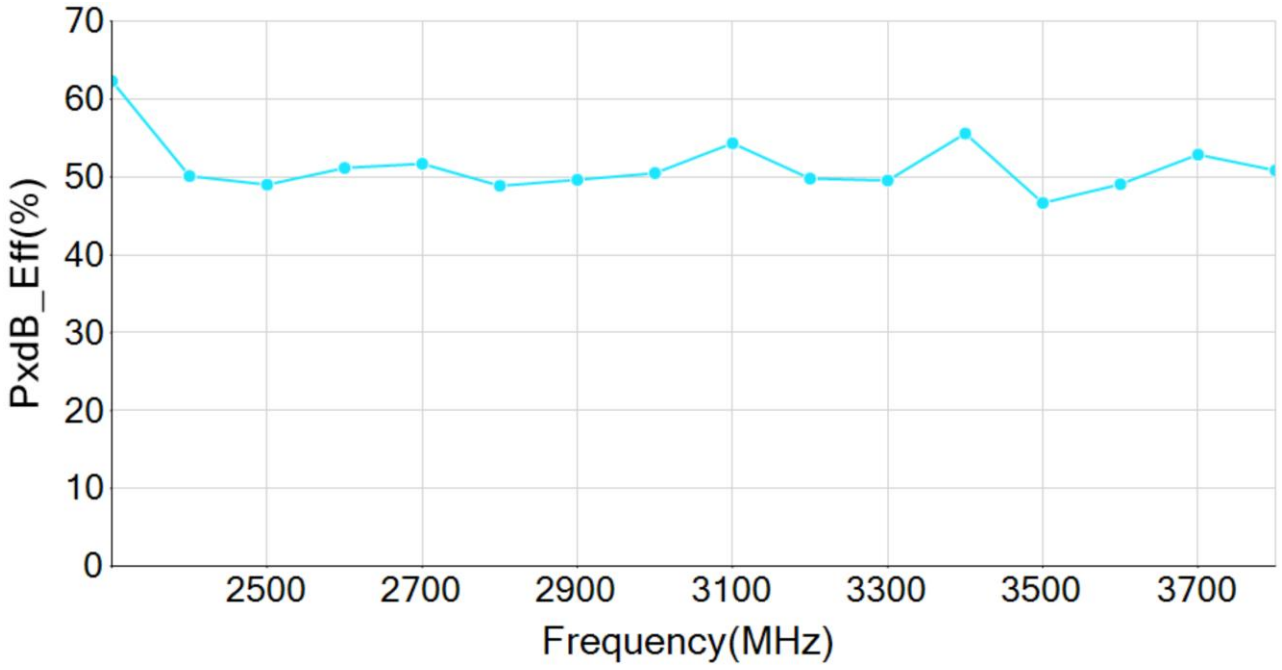

Guerrilla RF Proprietary Information. • ©2025 Guerrilla RF, Inc. • All rights reserved. • August 11, 2025

GRF0020 Evaluation Board Assembly Diagram

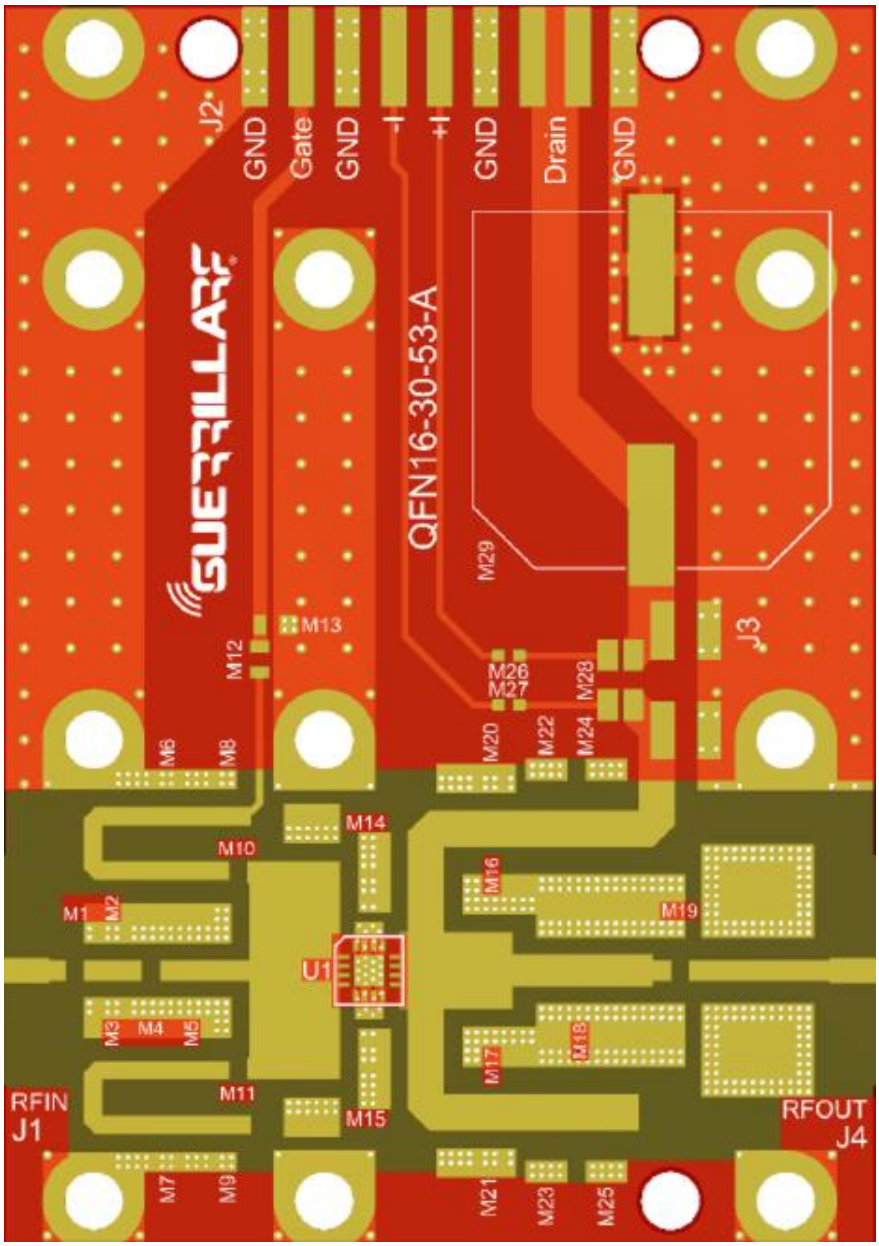


Guerrilla RF Proprietary Information. • ©2025 Guerrilla RF, Inc. • All rights reserved. • August 11, 2025
www.guerrilla-rf.com • (336) 510-7840 • sales@guerrilla-rf.com • 2000 Pisgah Church Road. Greensboro, NC 27455

GRF0020 Evaluation Board Assembly Diagram Reference: 2.3 to 3.8 GHz Tune


Component	Type	Manufacturer	Family	Value	Package Size	Substitution
M1	Resistor	Various	5%	2 Ω	0805	ok
M2, M3	Resistor	Various	5%	1 kΩ	0805	ok
M4	Capacitor	ATC	N/A	3.0 pF	0805	ok (Murata)
M5	Capacitor	ATC	N/A	1.2 pF	0805	ok (Murata)
M6	Capacitor	ATC	N/A	6.8 pF	0805	ok (Murata)
M7, M9, M11, M16, M17	DNP	--	--	--	--	--
M8	Capacitor	Murata	GRM	10 nF	0805	ok
M10	Resistor	Various	5%	5.1 Ω	0805	ok
M12	Resistor	Various	5%	0 Ω	0805	ok
M13	Capacitor	Murata	GRM	10 µF	0805	ok
M14, M15	Capacitor	ATC	N/A	0.5 pF	0805	ok (Murata)
M18	Capacitor	ATC	N/A	0.6 pF	0805	ok (Murata)
M19	Capacitor	ATC	N/A	6.8 pF	0805	ok (Murata)
M20, M21	Capacitor	ATC	N/A	6.8 pF	0805	ok (Murata)
M22, M23, M24, M25	Capacitor	Murata	GRM	10 µF	1210	ok
M26, M27	Resistor	Various	5%	1 kΩ	0603	ok
M28	Resistor	Ohmite	5%	0.01 Ω	1206	ok
M29	Electrolytic Capacitor	Various	N/A	220 µF	12.5 mm	ok
U1	GaN PA GRF0020	Guerrilla-RF	--	--	3 x 3 mm	no
J1, J4	SMA Connector	Various	--	--	--	--
J2	DC Connector	Various	--	--	--	--
J3	DNP	--	--	--	--	--
Evaluation Board	QFN16-30-53-A	--	--	--	--	--

Guerrilla RF Proprietary Information. • ©2025 Guerrilla RF, Inc. • All rights reserved. • August 11, 2025


Package Outline Drawing

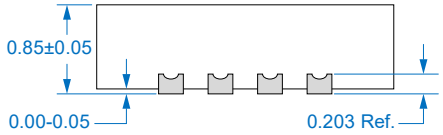

SIDE VIEW




TOP VIEW

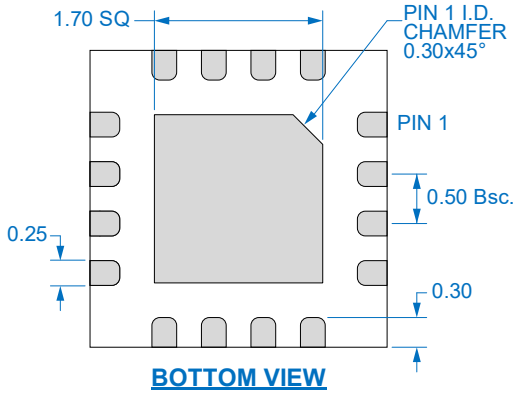

BOTTOM VIEW

Recommended PCB Footprint

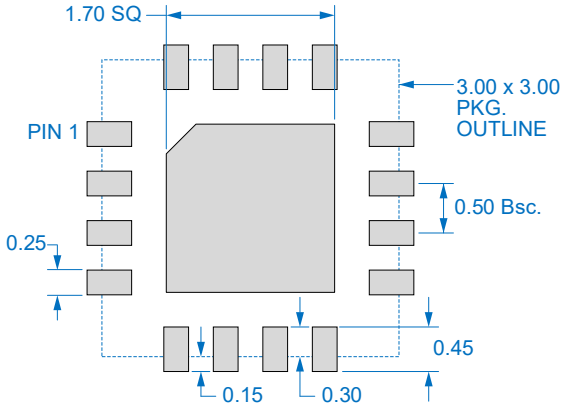

TOP VIEW

3 x 3 mm QFN-16 Package Dimensions

Guerrilla RF Proprietary Information. • ©2025 Guerrilla RF, Inc. • All rights reserved. • August 11, 2025

www.guerrilla-rf.com • (336) 510-7840 • sales@guerrilla-rf.com • 2000 Pisgah Church Road. Greensboro, NC 27455

Package Marking Diagram





- Line 1: "YY" = YEAR. "WW" = WORK WEEK the device was assembled.
- Line 2: "GRF" = Guerrilla RF.
- Line 3: "XXXX" = Device PART NUMBER.

Tape and Reel Information

Guerrilla RF's tape and reel specification complies with Electronic Industries Alliance (EIA) standards for "Embossed Carrier Tape of Surface Mount Components for Automatic Handling" (reference EIA-481). See the following page for the Tape and Reel Specification and Device Package Information table, which includes units per reel.

Devices are loaded with pins down into the carrier pocket with protective cover tape and reeled onto a plastic reel. Each reel is packaged in a cardboard box. There are product labels on the reel, the protective ESD bag and the outside surface of the box.
For the Tape and Reel Reference Table, please refer to: https://www.guerrilla-rf.com/prodFiles/Manufacturing/MN001.pdf

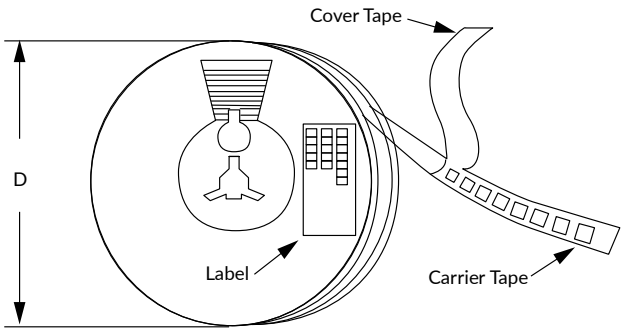

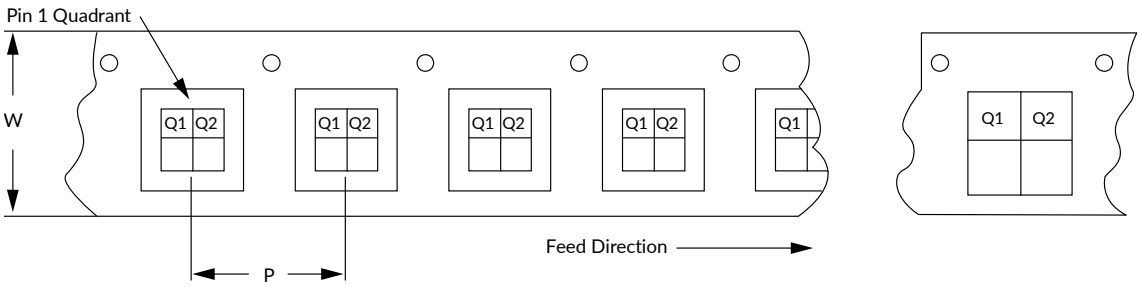

Carrier Tape Width (W), Pitch (P), Feed Direction and Pin 1 Quadrant Information

Guerrilla RF Proprietary Information. • ©2025 Guerrilla RF, Inc. • All rights reserved. • August 11, 2025

Revision History

Revision Date	Description of Change
September 23, 2024	Preliminary Data Sheet.
October 23, 2024	Updated plots on pages 10, 11 & 12.
April 28, 2025	Converted Data Sheet to new format only. No change to device or device specifications.
May 27, 2025	Updated Tables on page 8, 9 & 10. Added new Max Gain and Stability plots. Removed S-parameter plots.
August 11, 2025	Release Ø Data Sheet. Added 28 volt specifications.

Guerrilla RF Proprietary Information. • ©2025 Guerrilla RF, Inc. • All rights reserved. • August 11, 2025
www.guerrilla-rf.com • (336) 510-7840 • sales@guerrilla-rf.com • 2000 Pisgah Church Road. Greensboro, NC 27455

Data Sheet Classifications

Data Sheet Status	Notes
Advance	S-Parameter and NF data based on EM simulations for the fully packaged device using foundry-supplied transistor S-Parameters. Linearity estimates based on device size, bias condition and experience with related devices.
Preliminary	All data based on limited evaluation board measurements taken within the Guerrilla RF Applications Lab. All parametric values are subject to change pending the collection of additional data.
Release Ø	All data based on measurements taken with *production-released* material. TYP values are based on a combination of ATE and bench-level measurements, with MIN/MAX limits defined using *modelled estimates* that account for part-to-part variations and expected process spreads. Although unlikely, future refinements to the TYP/MIN/MAX values may be in order as multiple lots are processed through the factory.
Release A-Z	All data based on measurements taken with production-released material *derived from multiple lots which have been fabricated over an extended period of time*. MIN/MAX limits may be refined over previous releases as more statistically significant data is collected to account for process spreads.

Information in this data sheet is specific to the Guerrilla RF, Inc. ("Guerrilla RF") product identified.

This data sheet, including the information contained in it, is provided by Guerrilla RF as a service to its customers and may be used for informational purposes only by the customer. Guerrilla RF assumes no responsibility for errors or omissions on this data sheet or the information contained herein. Information provided is believed to be accurate and reliable, however, no responsibility is assumed by Guerrilla RF for its use, nor for any infringement of patents, or other rights of third parties, resulting from its use. Guerrilla RF assumes no liability for any data sheet, data sheet information, materials, products, product information, or other information provided hereunder, including the sale, distribution, reproduction or use of Guerrilla RF products, information or materials.

No license, whether express, implied, by estoppel, by implication or otherwise is granted by this data sheet for any intellectual property of Guerrilla RF, or any third party, including without limitation, patents, patent rights, copyrights, trademarks and trade secrets. All rights are reserved by Guerrilla RF.

All information herein, products, product information, data sheets, and data sheet information are subject to change and availability without notice. Guerrilla RF reserves the right to change component circuitry, recommended application circuitry and specifications at any time without prior notice. Guerrilla RF may further change its data sheet, product information, documentation, products, services, specifications or product descriptions at any time, without notice. Guerrilla RF makes no commitment to update any materials or information and shall have no responsibility whatsoever for conflicts, incompatibilities, or other difficulties arising from any future changes.

GUERRILLA RF INFORMATION, PRODUCTS, PRODUCT INFORMATION, DATA SHEETS AND DATA SHEET INFORMATION ARE PROVIDED "AS IS" AND WITHOUT WARRANTY OF ANY KIND, WHETHER EXPRESS, IMPLIED, STATUTORY, OR OTHERWISE, INCLUDING FITNESS FOR A PARTICULAR PURPOSE OR USE, MERCHANTABILITY, PERFORMANCE, QUALITY OR NON-INFRINGEMENT OF ANY INTELLECTUAL PROPERTY RIGHT; ALL SUCH WARRANTIES ARE HEREBY EXPRESSLY DISCLAIMED. GUERRILLA RF DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. GUERRILLA RF SHALL NOT BE LIABLE FOR ANY DAMAGES, INCLUDING BUT NOT LIMITED TO ANY SPECIAL, INDIRECT, INCIDENTAL, STATUTORY, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS THAT MAY RESULT FROM THE USE OF THE MATERIALS OR INFORMATION, WHETHER OR NOT THE RECIPIENT OF MATERIALS HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Customers are solely responsible for their use of Guerrilla RF products in the Customer's products and applications or in ways which deviate from Guerrilla RF's published specifications, either intentionally or as a result of design defects, errors, or operation of products outside of published parameters or design specifications. Customers should include design and operating safeguards to minimize these and other risks. Guerrilla RF assumes no liability or responsibility for applications assistance, customer product design, or damage to any equipment resulting from the use of Guerrilla RF products outside of stated published specifications or parameters.