

# ATC 200 A Series BX Ceramic Multilayer Capacitors

- Case A Size (.055" x .055")
- Low ESR/ESL
- Rugged Construction
- Capacitance Range 510 pF to 0.01  $\mu$ F
- Mid-K
- High Reliability

ATC, the industry leader, offers new improved ESR/ESL performance for the 200 A Series Capacitors. This Series exhibits high volumetric efficiency with superior IR characteristics. Ceramic construction provides a rugged, hermetic package.

Typical functional applications: Bypass, Coupling and DC Blocking.

Typical circuit applications: Switching Power Supplies and High Power Broadband Coupling.

## ENVIRONMENTAL TESTS

ATC 200 A Series Capacitors are designed and manufactured to meet and exceed the requirements of EIA-198, MIL-PRF-55681 and MIL-PRF-123.

### THERMAL SHOCK:

MIL-STD-202, Method 107, Condition A.

### MOISTURE RESISTANCE:

MIL-STD-202, Method 106.

### LOW VOLTAGE HUMIDITY:

MIL-STD-202, Method 103, Condition A, with 1.5 Volts DC applied while subjected to an environment of 85°C with 85% relative humidity for 240 hours min.

### LIFE TEST:

MIL-STD-202, Method 108, for 2000 hours, at 125°C. 200% WVDC applied.



## ELECTRICAL AND MECHANICAL SPECIFICATIONS

**DISSIPATION FACTOR (DF):** 2.5% max. @ 1 KHz

**TEMPERATURE COEFFICIENT OF CAPACITANCE (TCC):**  $\pm$ 15% maximum (-55°C to +125°C)

### INSULATION RESISTANCE (IR):

510 pF to 0.01 MFd:

10<sup>4</sup> Megohms min. @ +25°C at rated WVDC.

10<sup>3</sup> Megohms min. @ +125°C at rated WVDC.

### WORKING VOLTAGE (WVDC):

See Capacitance Values Table, page 2.

### DIELECTRIC WITHSTANDING VOLTAGE (DWV):

Case A: 250% of rated WVDC for 5 secs. (125 VDC)

**AGING EFFECTS:** 3% maximum per decade hour.

**PIEZOELECTRIC EFFECTS:** Negligible

**DIELECTRIC ABSORPTION:** 2% typical

### OPERATING TEMPERATURE RANGE:

From -55°C to +125°C (No derating of working voltage).

**TERMINATION STYLES:** Available in various surface mount styles. See Mechanical Configurations, page 3.

**TERMINAL STRENGTH:** Terminations for chips and pellets withstand a pull of 5 lbs. min., 10 lbs. typical, for 5 seconds in direction perpendicular to the termination surface of the capacitor. Test per MIL-STD-202, method 211.



**AMERICAN**

ATC North America  
sales@atceramics.com

**TECHNICAL**

ATC Europe  
saleseur@atceramics.com

**CERAMICS**

ATC Asia  
sales@atceramics-asia.com



ISO 9001 REGISTERED  
COMPANY

**THE ENGINEERS' CHOICE™**

**www.atceramics.com**

ATC # 001-811 Rev.M, 9/14

# ATC 200 A Capacitance Values

CAP. CODE	CAP. (pF)	TOL.	RATED WVDC	CAP. CODE	CAP. (pF)	TOL.	RATED WVDC
511	510	K, M, N	50	202	2000	K, M, N	50
561	560			222	2200		
621	620			272	2700		
681	680			332	3300		
751	750			392	3900		
821	820			472	4700		
911	910			502	5000		
102	1000			562	5600		
122	1200			682	6800		
152	1500			822	8200		
182	1800			103	10,000		


$VRMS = 0.707 \times WVDC$

SPECIAL VALUES, TOLERANCES, HIGHER WVDC AND MATCHING AVAILABLE. PLEASE CONSULT FACTORY.

## CAPACITANCE TOLERANCE

Code	K	M	N
Tol.	±10%	±20%	±30%

## ATC PART NUMBER CODE

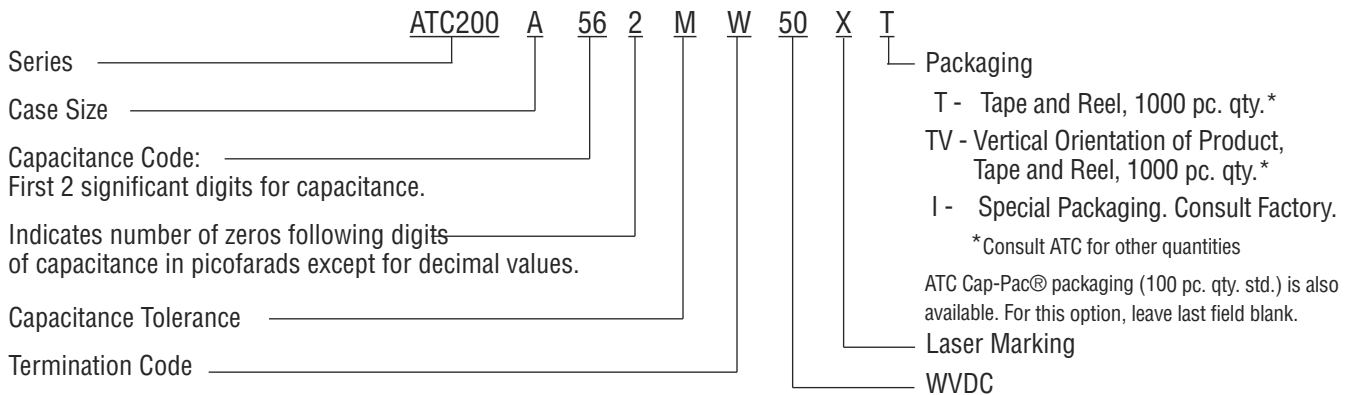

The above part number refers to a 200 A Series (case size A) 5600 pF capacitor, M tolerance (±20%), 50 WVDC, with W termination (Tin/Lead, Solder Plated over Nickel Barrier), Laser Marking and ATC Cap-Pac® packaging.

ATC accepts orders for our parts using designations *with* or *without* the "ATC" prefix. Both methods of defining the part number are equivalent, i.e., part numbers referenced with the "ATC" prefix are interchangeable to parts referenced without the "ATC" prefix. Customers are free to use either in specifying or procuring parts from American Technical Ceramics.

For additional information and catalogs contact your ATC representative or call direct at (+1-631) 622-4700.

Consult factory for additional performance data.









**A M E R I C A N T E C H N I C A L C E R A M I C S**

ATC North America  
sales@atceramics.com

ATC Europe  
sales@atceramics.com

ATC Asia  
sales@atceramics-asia.com

# ATC 200 A Capacitors: Mechanical Configurations

ATC SERIES & CASE SIZE	ATC TERM. CODE	CASE SIZE & TYPE	OUTLINES W/T IS A TERMINATION SURFACE	BODY DIMENSIONS INCHES (mm)			LEAD AND TERMINATION DIMENSIONS AND MATERIALS	
				LENGTH (L)	WIDTH (W)	THICKNESS (T)	OVERLAP (Y)	MATERIALS
200A	W	A  Solder Plate		.055 +.015 -.010 (1.40 +0.38 -0.25)	.055 ±.015 (1.40 ±0.38)	.057 (1.45) max.	0.010 +.010 - .005 (0.25 +0.25 - 0.13)	Tin/Lead, Solder Plated over Nickel Barrier Termination
200A	P	A  Pellet		.055 +.025 -.010 (1.40 +0.64 -0.25)	.055 ±.015 (1.40 ±0.38)	.057 (1.45) max.	0.010 +.010 - .005 (0.25 +0.25 - 0.13)	Heavy Tin/Lead Coated, over Nickel Barrier Termination
200A	T	A  Solderable Nickel Barrier		.055 +.015 -.010 (1.40 +0.38 -0.25)	.055 ±.015 (1.40 ±0.38)	.057 (1.45) max.	0.010 +.010 - .005 (0.25 +0.25 - 0.13)	<b>RoHS Compliant</b> Tin Plated over Nickel Barrier Termination
200A	CA	A  Gold Chip		.055 +.015 -.010 (1.40 +0.38 -0.25)	.055 ±.015 (1.40 ±0.38)	.057 (1.45) max.	0.010 +.010 - .005 (0.25 +0.25 - 0.13)	<b>RoHS Compliant</b> Gold Plated over Nickel Barrier Termination

A M E R I C A N T E C H N I C A L C E R A M I C S

ATC North America  
sales@atceramics.com

ATC Europe  
sales@atceramics.com

ATC Asia  
sales@atceramics-asia.com

# ATC 200 A Capacitors: Non-Magnetic Mechanical Configurations

ATC SERIES & CASE SIZE	ATC TERM. CODE	CASE SIZE & TYPE	OUTLINES W/T IS A TERMINATION SURFACE	BODY DIMENSIONS INCHES (mm)			LEAD AND TERMINATION DIMENSIONS AND MATERIALS	
				LENGTH (L)	WIDTH (W)	THICKNESS (T)	OVERLAP (Y)	MATERIALS
200A	WN	A Non-Mag Solder Plate		.055 +.025 -.010 (1.40 +0.64 -0.25)	.055 ±.015 (1.40 ±0.38)	.057 (1.45) max.	.010 +.010 - .005 (0.25 +0.25 - 0.13)	Tin/Lead, Solder Plated over Non-Magnetic Barrier Termination
200A	PN	A Non-Mag Pellet		.055 +.035 -.010 (1.40 +0.89 -0.25)	.055 ±.015 (1.40 ±0.38)	.057 (1.45) max.	0.010 +.010 - .005 (0.25 +0.25 - 0.13)	Heavy Tin/Lead Coated, over Non-Magnetic Barrier Termination
200A	TN	A Non-Mag Solderable Barrier		.055 +.025 -.010 (1.40 +0.64 -0.25)	.055 ±.015 (1.40 ±0.38)	.057 (1.45) max.	0.010 +.010 - .005 (0.25 +0.25 - 0.13)	<b>RoHS Compliant</b> Tin Plated over Non-Magnetic Barrier Termination

## Suggested Mounting Pad Dimensions

Horizontal Electrode Orientation

Vertical Electrode Orientation

Case A

	Pad Size	A Min.	B Min.	C Min.	D Min.
Vertical Mount	Normal	.070	.050	.030	.130
	High Density	.050	.030	.030	.090
Horizontal Mount	Normal	.080	.050	.030	.130
	High Density	.060	.030	.030	.090

Dimensions are in inches.

A M E R I C A N T E C H N I C A L C E R A M I C S


ATC North America  
sales@atceramics.com

ATC Europe  
sales@atceramics.com


ATC Asia  
sales@atceramics-asia.com

# ATC 200 A Performance Data


**ESR VS. CAPACITANCE  
ATC SERIES 200, CASE A**

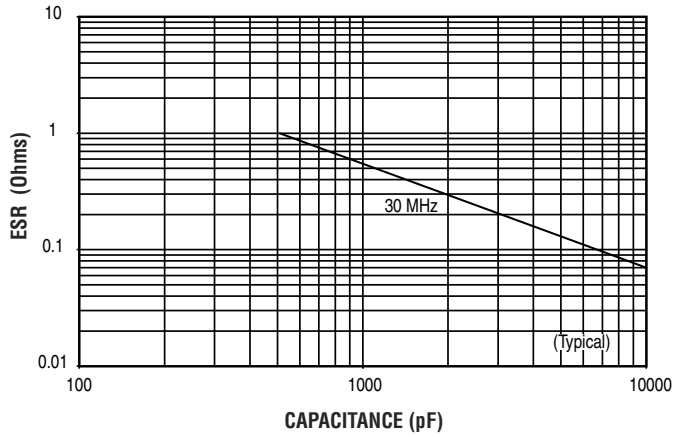


**Q VS. CAPACITANCE  
ATC SERIES 200, CASE A**

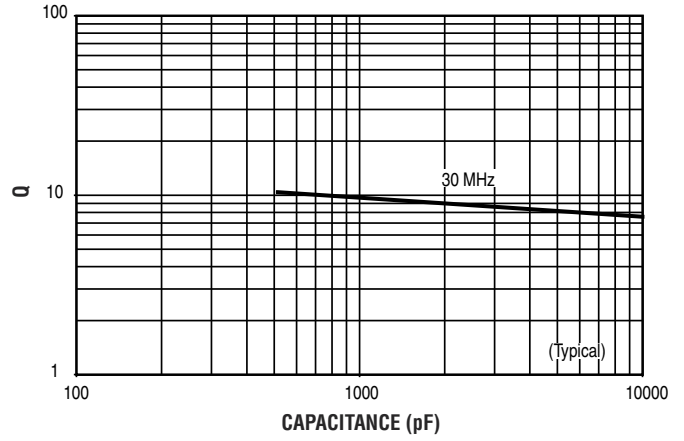

**SERIES RESONANCE VS. CAPACITANCE  
ATC SERIES 200, CASE A**

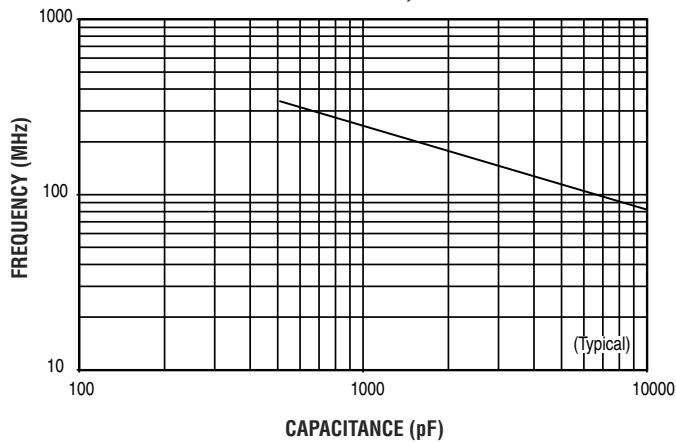

**CURRENT RATING VS. CAPACITANCE  
ATC SERIES 200, CASE A**

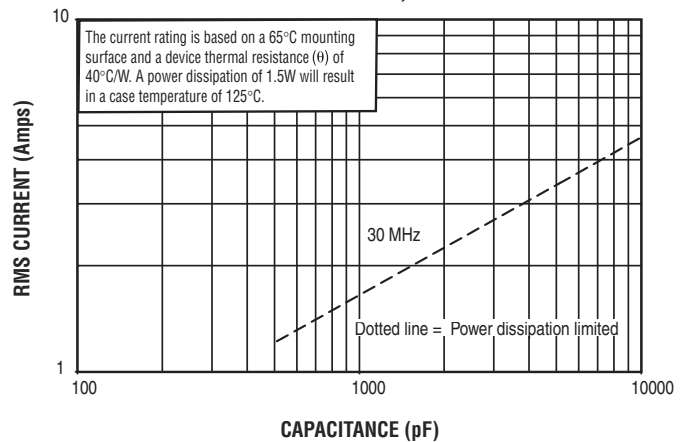

**A M E R I C A N   T E C H N I C A L   C E R A M I C S**

ATC North America  
sales@atceramics.com

ATC Europe  
sales@atceramics.com

ATC Asia  
sales@atceramics-asia.com

*Sales of ATC products are subject to the terms and conditions contained in American Technical Ceramics Corp. Terms and Conditions of Sale (ATC document #001-992 Rev. B; 12/05). Copies of these terms and conditions will be provided upon request. They may also be viewed on ATC's website at [www.atceramics.com/productfinder/default.asp](http://www.atceramics.com/productfinder/default.asp). Click on the link for Terms and Conditions of Sale.*

*ATC has made every effort to have this information as accurate as possible. However, no responsibility is assumed by ATC for its use, nor for any infringements of rights of third parties which may result from its use. ATC reserves the right to revise the content or modify its product without prior notice.*

© 1996 American Technical Ceramics Corp. All Rights Reserved.

ATC # 001-811 Rev. M, 9/14



**AMERICAN**

ATC North America  
[sales@atceramics.com](mailto:sales@atceramics.com)

**TECHNICAL**

ATC Europe  
[saleseur@atceramics.com](mailto:saleseur@atceramics.com)

**CERAMICS**

ATC Asia  
[sales@atceramics-asia.com](mailto:sales@atceramics-asia.com)

**THE ENGINEERS' CHOICE™**

**[www.atceramics.com](http://www.atceramics.com)**

